Half Sized, Same Wised **SE-1200 Pro**

Electrocardiograph

(0)0)

and a

05





SE-1200 Pro Electrocardiograph

Designed for the convenience of caregivers, the SE-1200 Pro enables easy-going workflows. The device will automatically record ECG once the signals are well sampled, and present a timely reminder when the lead wires are misconnected, or the pacemaker is detected.





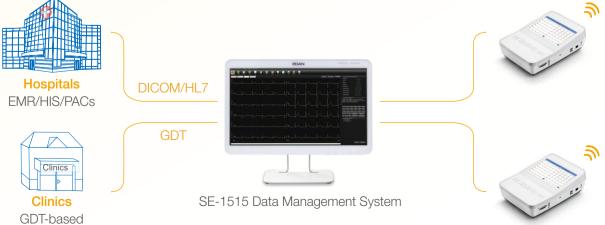

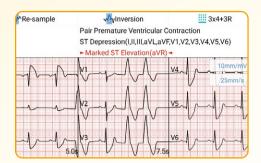


Pacemaker Analysis

80 kHz sampling rate.

Auto pacemaker detection.

Pick up pace signals lowest from 30µs, 500µV. Independent pacemaker detection channel.

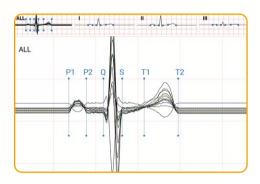


Gesture Amplification & Measurement

Users can amplify any segment of waveforms and measure it on the screen with gesture operation.

<							Compar	e							
12Load					d ECG Report						12Lead ECG Report				
The second secon	ľ	19921923050055 Department Roar 9 Bot-001 + 5,367 or			n.) Biagranis Realt Sana Rythe Boven DDS Basert Confirmal In:			181 (183 (pm) P (187 m) PR (1963 m) QPS (183 m) QPS (183 m) QPS (183 m)		198239622556828 Department) Ros Ros-1981 (1, 247 ex			n No. : Biogenois Result; Scrut Rythe Resul ECS Resul Confirme		
here	-l-	t	h	7-	-1-	-1-	R.	An		da	de	12			
Unh	h	h	h	-q-	-fr	+	la	An	A	the	A	12	m	4	
l z.		4-	4-	1	-fr	4	<u>[</u>				-1-		in	4	
-	-1-	-1-	T	to	h	4	1	m		-		-g2	the	4	
la				th	h	_h	"		i.	i.		.r.	t	1	
lt h	h	h	h	th	h	-4-	I.a.	.l.	.t.	the	A	1ª	h	1	
1 1 1 1 HE: 60 tpm 2010Tote: 356/056ms 2010Tote: 356/056ms 2010Tote: 356/056ms P: 86 m ProBSUT: 551/46/48 deg 2010Tote: 551/46/48 deg 2010Tote: 551/46/48 deg PR: 155 m SMILSVI: 1.161/0.388mV 306/571/46/48 deg 3010Tote: 551/46/48 deg PR: 155 m SMILSVI: 1.161/0.388mV 3010Tote: 551/46/48 deg 3010Tote: 551/46/48 deg PR: 156 m SMILSVI: 1.161/0.388mV 3010Tote: 551/46/48 deg 3010Tote: 551/46/48 deg			J J J J J J J J J J J J J J J J J J J				148 : 50 bpm 071/07:05 : 356/359ms P : 87 ms P/068/17 : 51/44/50 deg PR : 150 ms PV0:097 : 1150/0836mV Q45 : 89 ms 99/4.2071 : 1150/0836mV				5.4s Sinus Rightm Narmal ECG				

Serious Diseases Notification

A red notification will identify the severe illnesses after the diagnosis.

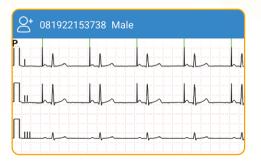

Averaged Template

The device identifies the averaged template's P, Q, S, and T points with the relevant measurement parameters. Doctors can relocate these points manually and recalculate the corresponding parameters.



Reports Comparison

Users can compare two reports on the screen to follow a patient's clinical condition.



SE-1200 Pro Electrocardiograph



Global Headquarters: Edan Instruments, Inc. | 15 Jinhui Road, Pingshan District, Shenzhen 518122 P.R. China | +86.755.26898326 | www.edan.com | info@edan.com U.S. and Canada inquiries: EDAN Diagnostics, Inc. | 9918 Via Pasar, San Diego, CA 92126 +1.858.750.3066 | www.edandiagnostics.com | edan-info@edandiagnostics.com

© Edan Instruments, Inc. All rights reserved. Features and specifications are subject to change without prior notice. No reproduction, copy or transmission may be made without written permission. Not all products or features are available in all countries, contact Edan for local availability. CE 0123 ENG-ECG-SE-1200 Pro V1.1-20240515